

2009


SSi-Global Corp



Technical Brochure

ecoPower®

Hybrid Ventilators



Summary

ecopower® hybrid ventilation is a dramatic new innovation for the market. It is manufactured by CSR Edmonds in Australia, and sold under license in the USA by **SSi-Global Corp.**

A vent is not just a component, but is integral to the workings of any building. Ventilation is required in all buildings as prescribed by legislation, to ensure acceptable living and working environments for our families, friends and colleagues.

Moving to 'Green' building ratings for energy efficiency has required building designers to focus on all sources of power consumption that can be reduced with the use of advanced technology. This includes mechanical ventilation.

A substitute for mechanical ventilation is natural ventilation which uses no power. Natural ventilation, and in particular wind driven ventilation, has been with us for many years. It is proven and well used but has limitations with respect to control of ventilation rates due to its dependency on ambient conditions. Chimneys, open windows and natural convection can also be utilized, but again with limited control.

Hybrid ventilation as embodied in the ecopower range, utilizes natural ventilation along side high efficiency mechanical ventilation in the one unit. The ecopower design allows the wind turbine itself to be used as a centrifugal impeller when running in powered mode. No separate fan is required for the provision of mechanical ventilation. This utilizes the best features of each while eliminating their relative drawbacks. The drawbacks of previously existing separate fan/ natural vent combination units being blockage of the inlet throat by the fan and impedance of the fan performance by the natural vent.




Lower Power Consumption & Lower Noise

Comparisons of noise performance & power consumption against standard axial mechanical ventilation is shown summarized in Table 1. The **ecopower** uses *less than half* the power consumption compared with a standard axial fan and reduces noise by around 10dB(A) in comparison to standard axial mechanical roof ventilation units.

Table 1

| | Power [W] | | Noise @3m [dB(A)] | |
|-------|--------------|------------|-------------------|------------|
| | Hybrid | Axial Vent | Hybrid | Axial Vent |
| EP400 | 63% lower | 160 | 9 dB(A) lower | 55 |
| EP600 | 76% lower | 480 | 11 dB(A) lower | 60 |





Save Money & Reduce CO2 Emissions

Here's a switch. Save money and reduce emissions.

An example case study demonstrates the potential savings that *ecopower* can provide. For a relatively small installation of 10 EP600 units, 75% cost and CO2 emission reductions are possible when compared with standard axial mechanical roof ventilation units. **This equates to annual savings of \$1763 and 12.3 tonnes of greenhouse gas emissions.**


Compared with pure wind ventilators, *ecopower* is a demand ventilator that can provide a guaranteed ventilation rate when required, no matter what the prevailing wind conditions. This is important for many applications. In power mode, *ecopower* has a flow rate 3 - 5 times greater than the equivalent size wind ventilator operating at average capital city wind speeds.

Leading Edge Technology

The EC (Electronic Commutation) motor technology itself is innovative and groundbreaking, creating new advances to benefit original equipment manufacturers and end users. These innovations include:

- ◆ Use of highly efficient DC motors that connect direct to AC mains, eliminating the need for expensive and high risk installations.
- ◆ 100% noiseless speed control from any sensor input, BMS (Building Management System) or internet access systems. The EC motor in the EP900 can operate in isolation, while also logging its operation for later analysis.
- ◆ Input voltage range of 200 to 277VAC and 50/60 Hz. The ventilation performance does not change, the motor is intelligent enough to know what the conditions are and adjust its performance accordingly.


This really is leading edge technology evolving ventilation technology.

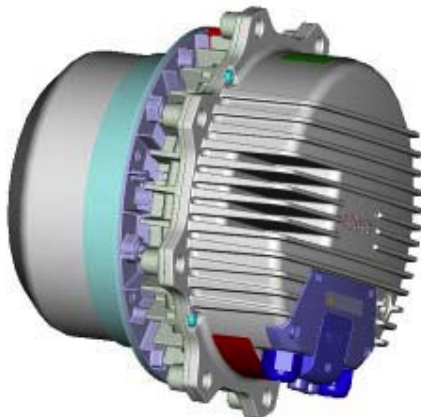

To achieve this revolutionary design required a powerful, efficient, robust and low free running resistance motor to allow the direct drive design to work at its best. These qualities were found in the latest range of EC motors from German manufacturer ebm-Papst.

Use of the latest DC motor techniques but with new leading edge technology and integrated commutation electronics result in a unit that can be connected directly to AC mains (for sizes 400 and larger). The EP900 will also incorporate intelligent speed control; so a simple sensor can be connected for full feedback control. A computer can be connected to the unit to program the desired control function, and then unplugged; the unit will look after itself and advise if it has a problem.






How It Works

The ecopower hybrid is a new, innovative combination of natural ventilation and efficient mechanical ventilation. The natural ventilation mode functions through two processes. The first allows hot air to escape as a result of 'stack effect' buoyancy pressure. The second process results from the ambient wind driving the turbine/impeller unit thereby creating flow through a centrifugal suction process. The efficient power mode allows flow rates to be boosted when required by powering the EC motor to drive the turbine/impeller. This provides on demand response to meet prevailing needs.

Ventilation is a key requirement in any building. Before ecopower, the only solution, where natural and mechanical ventilation were required from a vent, involved installing an axial fan in the throat of a natural ventilator. This design had serious drawbacks. When not running in power mode the fan obstructed flow of the natural vent and when the fan was operating the natural vent impeded the fan performance. The ecopower design has eliminated this problem through the use of the wind turbine itself as a centrifugal impeller when running in powered mode. There is no separate fan required for mechanical ventilation. The ecopower is therefore more than a natural vent and more than just a fan. It combines the best of both technologies and eliminates their drawbacks into a cost effective and reliable hybrid vent that takes vent design to a new level in product evolution.

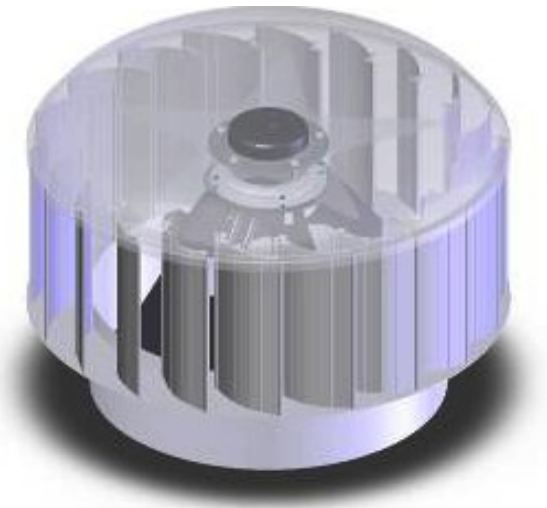

The ecopower, has been designed to address the main issues that concern users, namely:


- ◆ Energy costs.
- ◆ Maintenance costs.
- ◆ Noise.
- ◆ Reliable ventilation when required.

In order to address these issues real innovation has been used in all stages of the design. The use of the direct drive EC motor reduces energy use, virtually eliminates maintenance costs and greatly reduces noise. The turbine/impeller unit with large inlet throat area allows for large flow rates at lower power consumption levels.

As illustrated in Figures 2 and 3, ecopower can use its combined natural and power modes to ventilate and cool buildings such as classrooms. The power mode provides guaranteed ventilation rates regardless of the wind conditions. This is of significance in all Australian climates and especially high humidity environments where air movement is essential for cooling.

The combination of both mechanical and natural ventilation allows for greater cooling effects to be achieved. This is shown in Figure 4 where cooling rates can be improved by 300% to 500% using the higher flow rates of the power mode over natural ventilation alone.





How It Works

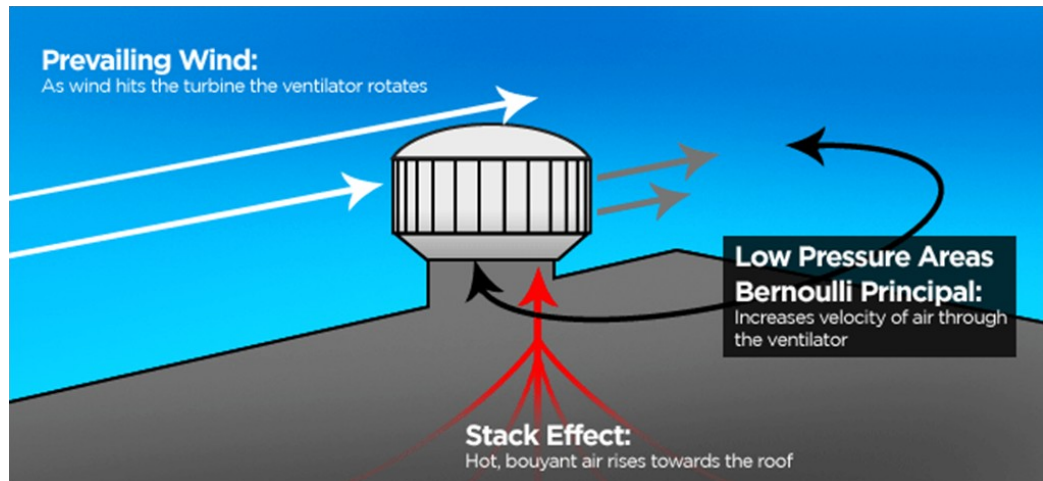


Figure 2: Air flow patterns for hybrid ventilator turbines.


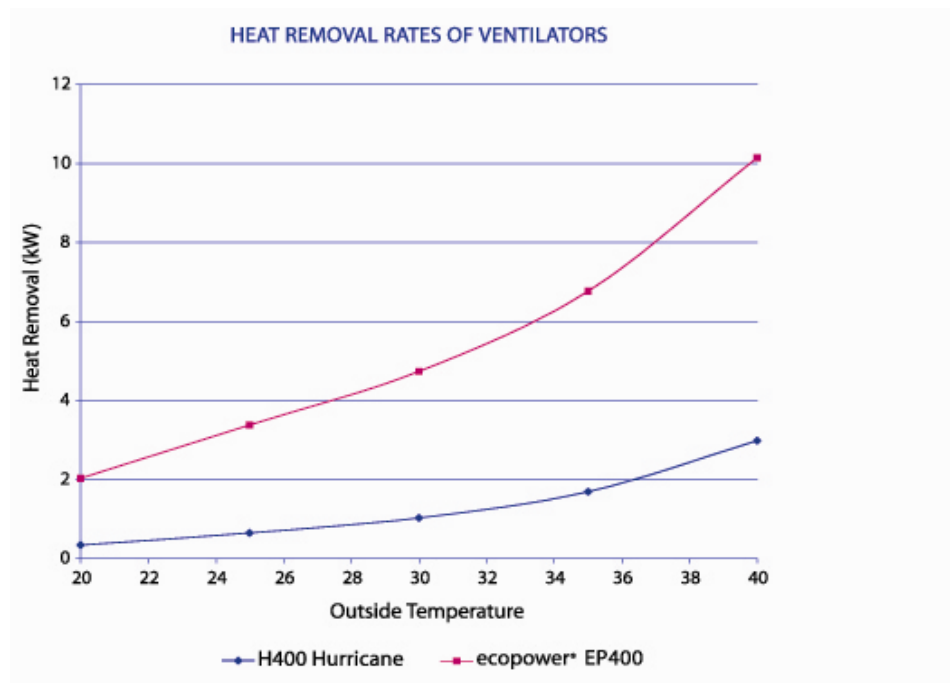


Figure 3: Heat removal rates of natural Edmonds Hurricane ventilators in comparison to powered ecopower units





Paradigm Shift in Ventilation

The application of this motor technology has opened new doors to end users to explore and CSR Edmonds has utilized this vehicle to create a paradigm shift in ventilation technology. This advanced motor technology provides a simple use of high efficiency DC motors that connect direct to AC mains eliminating expensive and high risk installation issues.



The motor design is a world-wide product with one design with an input voltage range of 200 to 277V AC and 50/60 Hz. The ventilation performance will not change; the motor is intelligent enough to know where it is and adjust its performance accordingly to operate at the set speed regardless of voltage or frequency. It is no longer necessary to stock different products for different systems.

Utilizing the control functions of the EC motor, hybrid ventilation systems can now be integrated into standard building management systems and controlled using standard sensor inputs.


Dramatic advances are available in the integral control functions of the motor thereby providing 100% noiseless speed control from any sensor input, BMS or internet access systems. The EC motor used in the EP900 can operate in isolation, while also logging its operation for later analysis. The motors can be controlled remotely via building management systems providing either a 0-10V or 4-20mA control input to the motor. This allows minimum ventilation rates to be achieved by ensuring minimum rotation rates but enabling the ventilation rate to be increased when heat load or greater ventilation rates are required.

The ecopower can be used with sensor units which have variable control inputs so stand alone units can be used to stack ventilate a car park when the CO levels are being closely monitored.

Indeed the ecopower can self regulate by means of an anemometer. In this case the anemometer measures the wind speed and hence the ventilation rate while in natural ventilation mode and then switches the unit to powered mode when the wind speed drops.

In harmony with the development spirit of ecopower the EC motor controls over 100% of its speed without loss of efficiency and without an increase in noise. This is a marked improvement with respect to most speed control systems utilized with AC motors.





Performance

Natural ventilation, and in particular wind driven ventilation systems, have been with us for many years. They are proven and well used but have limitations with respect to control of ventilation rates. Chimneys, open windows and natural convection can also be exploited but again with limited control of ventilation rates.

Hybrid ventilation combines natural ventilation with high efficiency mechanical ventilation. It provides the best of both worlds by overcoming the limitations of each. In power mode, *ecopower* has a flow rate 3 – 5 times greater than the equivalent size wind ventilator operating at average capital city wind speeds.

The *ecopower* is available in five sizes and further units will be released later next year. The details of the range are shown in the following tables. This shows that ventilation rates up to 5886 CFM (10,000 m3/hr) are currently available. Supply voltages in both AC and DC are catered for allowing both solar and standard power systems to be used.


| SERIES | WIND ONLY PERFORMANCE | | MAX POWER watts | POWER PERFORMANCE | | |
|--------------|-----------------------|-----|-----------------|---------------------|------|-----------|
| | Output Rating m3/hr | CFM | | Output Rating m3/hr | CFM | Speed RPM |
| ecoPower 100 | 41.4 | 24 | 3.6 | 99 | 58 | 424 |
| ecoPower 150 | n/a | - | 10.0 | 198 | 117 | 410 |
| ecoPower 400 | 864.6 | 509 | 68 | 2450 | 1442 | 313 |
| ecoPower 600 | 1435.4 | 845 | 116 | 4250 | 2501 | 235 |
| ecoPower 900 | TBD | TBD | 260 | 10000.0 | 5886 | 180.0 |

A comparison between the powered performance of the *ecopower* and standard axial roof ventilation units in Table 2 highlights the differences. Massive reductions in noise: 9-11 dB(A) and power consumption: over 60% can be achieved. But, this is only in powered mode, in natural ventilation mode NO power is consumed.

| Product | Exhaust rate [m³/hr] | Power [W] | Noise @ 3m [dB(A)] |
|-------------------------|----------------------|------------------|-----------------------|
| 300mm, 2p, 1~ Axial fan | 2160 | 160 | 55 |
| EP400 | 2400 | 68 | 46 |
| Improvement | | 63% lower | 9 dB(A) lower |
| 450mm, 4p, 1~ Axial fan | 4280 | 480 | 60 |
| EP600 | 4280 | 116 | 49 |
| Improvement | | 76% lower | 11 dB(A) lower |

Table 2: Exhaust rate, power and noise comparisons between *ecopower* and standard axial mechanical roof ventilation units.





Example Cost Savings & CO2 Emissions Reduction

An example case study is illustrated in Table 3, demonstrates running cost savings and CO2 emission reductions of 75% based on the use of coal-fired electricity. In this example this equates to a \$1763 annual saving and 12.3 tonne annual reduction in greenhouse gas emissions. The ecopower not only uses less power in powered mode but can also run for a shorter period due to the availability of continuous ventilation in natural mode. This allows for similar air change rates over a day compared to the mechanical unit which must run for a longer period.

| Product | No. of units | Exhaust Rate | Run Time | Annual Energy Consumption [kWh] | Annual Energy Cost @ 10c/kWh | CO ₂ emissions @700g/kWh [tonnes] |
|---|--------------|--------------|--|---------------------------------|------------------------------|--|
| EP600 | 10 | same | 8hrs power 16hrs natural | 3387 | \$338.70 | 2.4 |
| Standard Mechanical Axial Roof Fan Unit | 10 | same | 12hrs on 12hrs off (no ventilation) | 21024 | \$2102.40 | 14.7 |

Table 3: Energy cost and emission comparison between ecopower and standard axial mechanical roof ventilation unit

Achievements

Verification of fan performance has been achieved in a test rig according to AS4740:2000. This has given building service designers the confidence to reduce their existing power bills.

Two notable but differing projects are the Mercure Hotel Sydney Airport and Alexandra Hills State High School QLD as shown in the Figures below.




Ecopower installation on Mecure Hotel, Sydney Airport



ecopower installation in Alexandra Hills State high school






Awards

ebm-papst and EC technology has won the following awards:

- ◆ AIRAH excellence award for HVAC 2008
- ◆ COOLworld (Au) Excellence and Green Innovator awards 2008
- ◆ ARH Expo (US) innovation award 2008 and 2004
- ◆ Cooling Industry Award (UK) 2005
- ◆ H+V (UK) award 2006
- ◆ ACR (UK) award 2005






Technical Data Sheet

ECOPOWER 400


DATE: 6 March 2006 REVISED: 25 July 2008

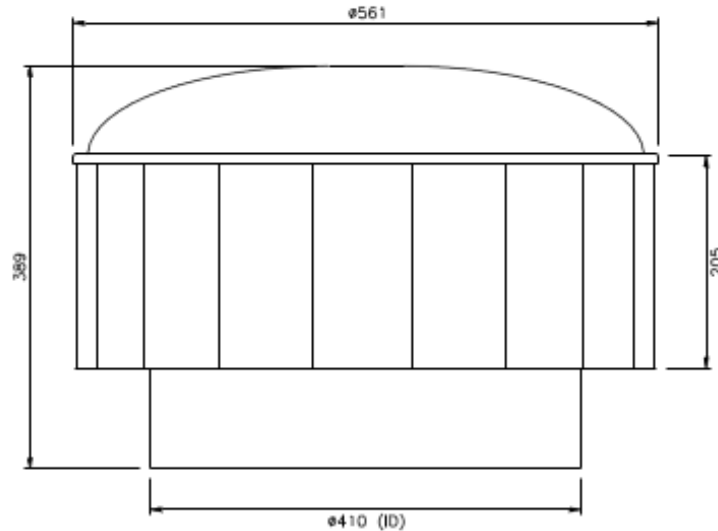


SPECIFICATIONS:

| | |
|-------------|--|
| MATERIAL: | Turbine & throat: Aluminium 5005 Dome: Aluminium 1200 Brackets: Mild Steel (Powdercoated) |
| WEIGHT: | 7.6kg |
| ELECTRICAL: | Electronic Commutating (EC) motor Input Voltage: 200-277 VAC 50/60 Hz Max. running current draw: 0.28 A Max. running power consumption: 68 W Specific flow rate (@ $\Delta p=0$): 38 m ³ /hr/W Sound Pressure Level L _A (@ 3m & $\Delta p=0$): 46 dB(A) |

Performance Chart

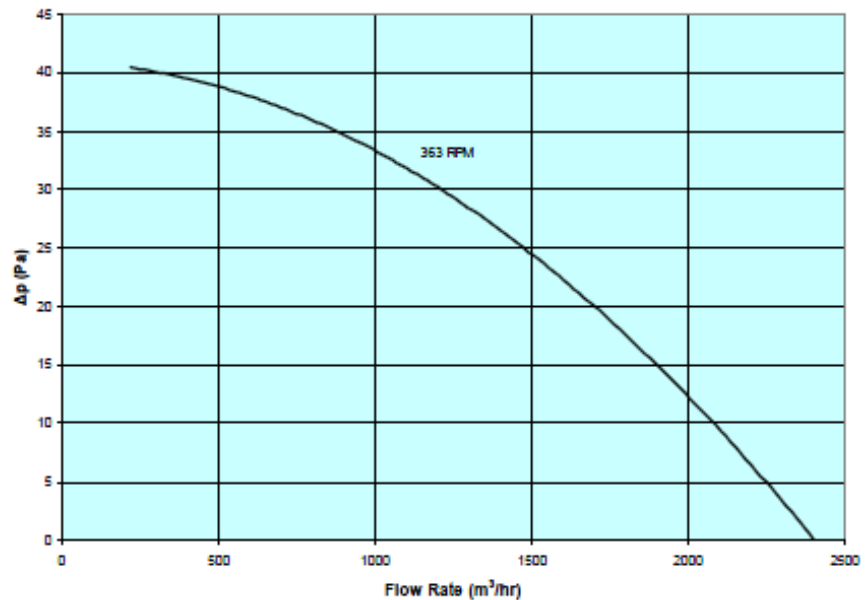




Technical Data Sheet

ECOPOWER 600

DATE: 15 September 2006


REVISED: 25 July 2008

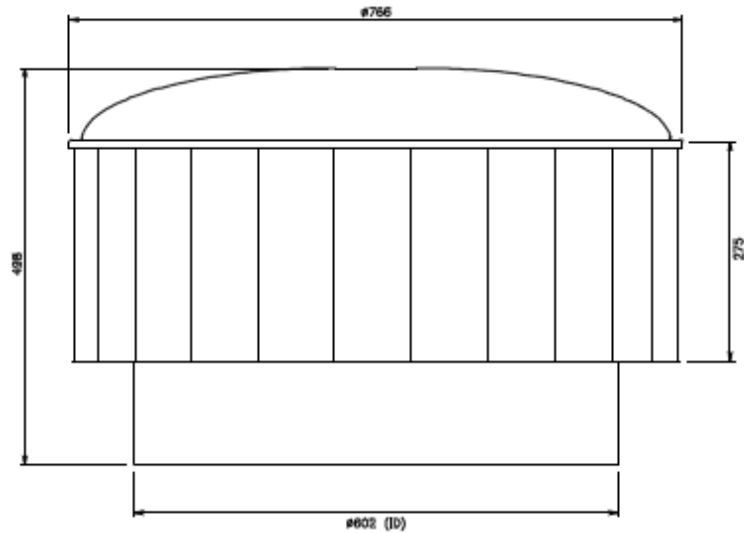


SPECIFICATIONS:

- MATERIAL:** Turbine & throat: Aluminium 5005
 Dome: Aluminium 1200
 Brackets: Mild Steel (Powdercoated)
 Support arms: Nylon 6 30% Glass Filled
- WEIGHT:** 14.4kg
- ELECTRICAL:** Electronic Commutating (EC) motor
 Input Voltage: 200-277 VAC 50/60 Hz
 Max. running current draw: 0.47 A
 Max. running power consumption: 116 W
 Specific flow rate (@ $\Delta p=0$): 41 m³/hr/W
 Sound Pressure Level L_A (@ 3m & $\Delta p=0$): 49 dB(A)

Performance Chart

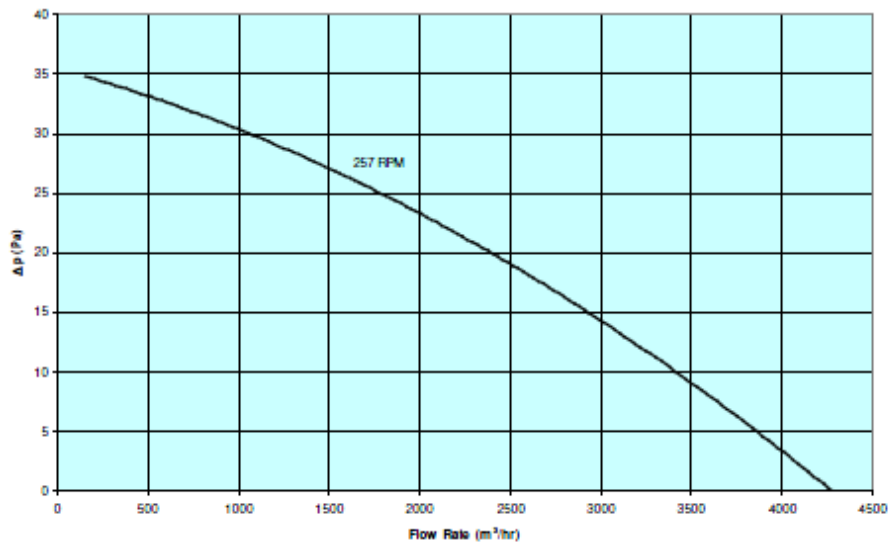




Technical Data Sheet

ECOPOWER 900


DATE: 2 September 2008

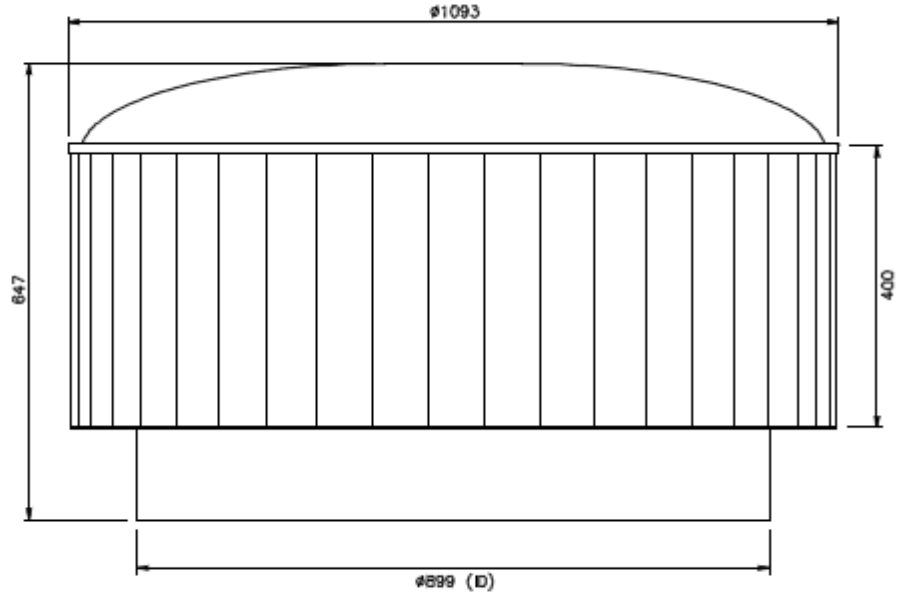


SPECIFICATIONS:

| | | |
|--------------------|---|-----------------------------|
| MATERIAL: | Turbine & throat: Aluminium 5005 | |
| | Dome: Aluminium 3003 | |
| | Brackets: Mild Steel (Powdercoated) | |
| | Support arms & motor housing: Glass Reinforced Nylon 6 | |
| WEIGHT: | 30kg | |
| ELECTRICAL: | Motor: | Electronic Commutating (EC) |
| | Input Voltage: | 200-277 VAC 50/60 Hz |
| | Max. running current draw: | 1.21 A |
| | Max. running power consumption: | 260 W |
| | Specific flow rate (@ $\Delta p=0$): | 46 m ³ /hr/W |
| | Sound Pressure Level L _A (@ 3m & $\Delta p=0$): | 45.5 dB(A) |

Performance Chart

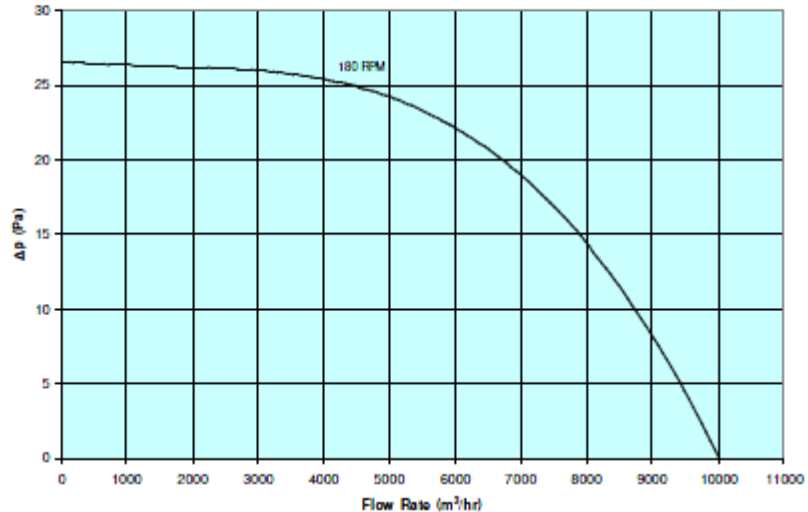




Color Chart



Most colors are available for the ecopower. However, some colors may be special order and require extra time for manufacture & shipping. Please confirm color availability with your sales representative.

We will do our best to provide a color that you desire.





To contact us:

SSi-Global Corp

USA licensed distributor for ecoPower by CSR Edmonds, Au

Office

14090 Southwest Freeway, Suite 300
Sugar Land, Texas
USA
77478

Assembly, Sales & Distribution Center

4100 Greenbriar Dr., Suite 150
Stafford, Tx
USA
77477

Phone:

Main: 281 313 1933
Toll Free: 1 866 673 8902
Fax: 281 313 1938

E-mail: sales@ssi-global.com
info@ssi-global.com

Internet: www.ssi-global.com

